
PICOROC®

SPEEDRILL Quarry

A modern unrivalled leadership

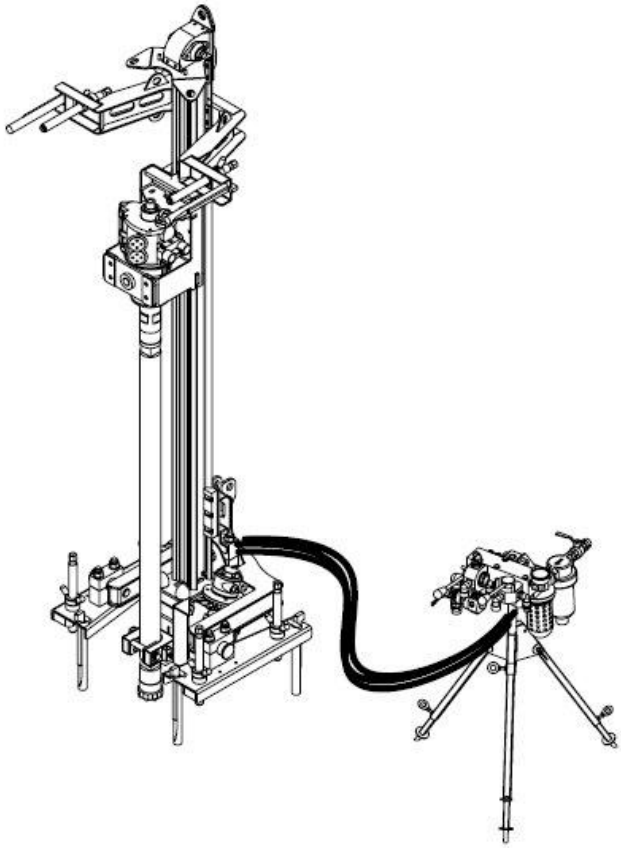

Pneumatic chain drill for vertical and horizontal drilling equipped with down-the-hole hammer, designed for preparing cuts with diamond wire. The presence of the aluminium column and the possibility of dismantling the machine into four parts facilitate transport and handling.

## Technical Features

**Standard version:**

- Control unit with line lubricator and feed pressure regulator, weight 140 lbs;
- Pneumatic motor for drill carriage travel;
- Rotation head 90 Nm approx. RD50;
- Down-the-hole carriage sliding pads in self-lubricating material;
- Stainless steel sliding plate;
- Total weight with rotation head 660 lbs;
- Hook for lifting and handling;
- Air consumption 1,300/1,600 gal/Min;
- Prepared for 2” or 3” down-the-hole hammer;
- Rod diameter 2” or 3”.

PICOROC®

Quarry
SPEEDRILL


**Optional:**

- Shock absorber;
- Adaptation sleeves;
- Down-the-hole hammer;
- Down-the-hole drill bit;
- Extension rods;

**Technical specifications:**

- Start drilling with 1.50 m rods;
- Useful stroke: 1.80 m;
- Wrench for rods Ø 54/76 mm;
- Air consumption: 5,000/6,000 Lt/min;
- Minimum down-the-hole height from ground 0.10 m.

**Machine movements:**

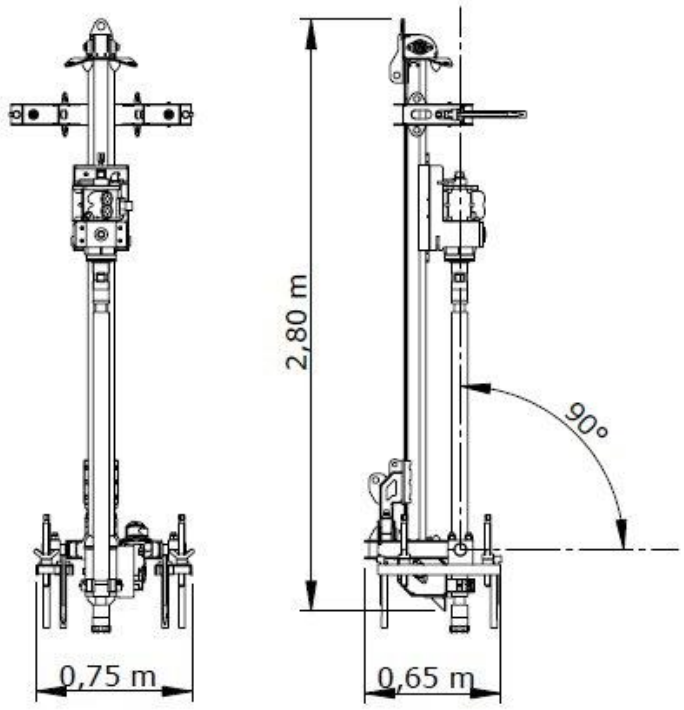


**Transport dimensions:**

| | | | |
|---|---|---|---|
| Weight without the hammer: | 660 lbs. | Total lenght: | 9,2 ft. |
| Weight rod 3” | 24 lbs | Total width: | 2,5 ft. |
| Weight DTH | 66 lbs | Height: | 2,1 ft. |
| Weight bit 3” | 11 lbs | | |